




PeoKan Driveshaft CORP.

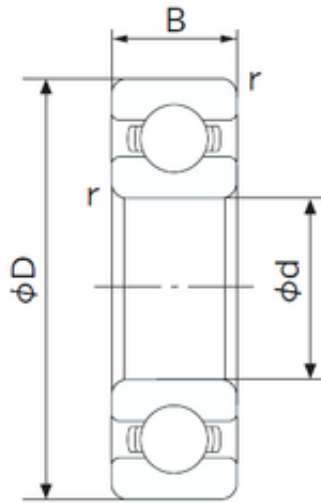

6203 Bearing 2D drawings and 3D CAD models

Timken NSK SKF NTN Koyo NACHI THK
 Snr Hiwin Deep Groove Ball Bearing Tapered
 Roller Bearing Spherical Roller Bearing Wheel Hub
 Bearing 6203 6201 6205 6301 6305

Bearing No. 6203

| | |
|-------------------------------|--------------------------|
| Size | 17x40x12 mm |
| Bore Diameter | 17 mm |
| Outer Diameter | 40 mm |
| Width | 12 mm |
| d | 17 mm |
| D | 40 mm |
| B | 12 mm |
| C | 12 mm |
| r min. | 0.6 mm |
| da min. | 22 mm |
| Da max. | 35 mm |
| ra max. | 0.6 mm |
| Weight | 0.065 Kg |
| Basic dynamic load rating (C) | 9,55 kN |
| Basic static load rating (C0) | 4,8 kN |
| (Grease) Lubrication Speed | 17000 r/min |
| Category | Single Row Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | NACHI |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0 |
| Product Group | B00308 |
| Enclosure | Open |
| | |



PeoKan Driveshaft CORP.

| | |
|---------------------------------|---|
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | No |
| Internal Special Features | No |
| Cage Material | Steel |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |
| Long Description | 17MM Bore; 40MM Outside Diameter; 12MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage |
| Other Features | Deep Groove |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.nachiamerica.com |
| Weight / LBS | 0.146 |
| Outer Race Width | 0.472 Inch 12 Millimeter |
| Outside Diameter | 1.575 Inch 40 Millimeter |
| Inner Race Width | 0 Inch 0 Millimeter |
| Bore | 0.669 Inch 17 Millimeter |
| Bore Type | Cylindrical Bore |
| Configuration | Single Row |
| Bore Size | 17 mm |
| Width | 12 mm |
| | |



PeoKan Driveshaft CORP.

| | |
|-------------------------|-------------------|
| Fillet Radius/Chamfer | 0.6 mm |
| Dynamic Load Rating | 9,550 N |
| Static Load Rating | 4,800 N |
| Limiting Speed - Grease | 18,000 rpm |
| Limiting Speed - Oil | 21,000 rpm |
| Factor fo | 13.1 |
| Radial Clearance | 0.003 to 0.018 mm |
| da (min) | 22 mm |
| Da (max) | 35 mm |
| ra (max) | 0.6 mm |